

Extreme Versatility: Only NSF approved machine to clean "Utensils, Pots, Pans & Dishes"



Ideal for Supermarkets,
Schools, Bakeries,
Commissaries, & Caterers

At American Dish Service, Quality People, Designs, and Products have been the foundations of our organization for over *45 years*.

www.americandish.com



## Model HT-34


This Powerful, Next Generation, Utensil Pot Washer/ Dishwasher provides you with all these features

- NSF Rating to Clean Pots & Dishes
- 72 Second Time Cycle
- Wash Extender for Extra Scouring Time
- Optional Built-On 70 Degree Rise Booster
- Patented Self Cleaning Spray System
- Auto Fill and Auto Shut Off
- ADS Patented Low-Water Tank Clean
- Built-In Scrap Accumulator Keeps Wash Tank Clean
- 1.25 Gallons per Rack
- 23" Door Opening
- Powerful 3HP Wash Pump



**Requires Deep Tables** 

## Provides the scrubbing action needed for both applications




## CAUTION:

Electrical and plumbing connections must be made by a qualified Service Person who will comply with all available federal, state, and local Health, Electrical, Plumbing, and Safety Codes.

\* Manufacturer reserves the right to modify these specifications in compliance with regulatory agencies and manufacturing expediency.

NOTE: All Three Doors Open in Unison for Inspection & Cleaning Purposes and Allows for Inline or Corner Applications without Conversion Procedures.

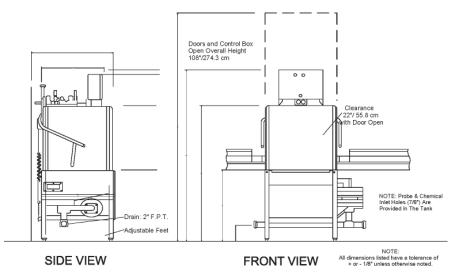

WWW.AMERICANDISH.COM

Effective: 7/06







## Model HT-34 Specifications

J.S. REGISTERED PATENTS

	U.S. REGISTERED	U.S. REGISTERED PATENTS	
	RATED CAPACITY (Racks/Hour)	46 NSF Rated	
	WASH TANK CAPACITY	15.8 Gal. (59.8 Liters)	
	WATER TEMPERATURE, WASH	160 F. (71 C)	
	WATER TEMPERATURE, RINSE	180 F. (82.2 C)	
	WATER CONSUMPTION	1.25 Gallons/Rack	
	WASH MOTOR ELECTRICAL REQUIREMENTS	3 HP	
		Nuetral Wire, and Clean Circuits with ground.  1PH, 208/240V, 60Hz, 60/30 AMP  1PH, 60/4mp requires 5 AWC phase wires  30 Amp requires 10 AWC phase wires wi10 AWG  Nuetral Wire, and Clean Circuits with Ground	
	WASH HEATER	Call Factory for Requirements for Booster Heater	
	RACK SIZE	Large: 28.75"/Std: 19.75"	
en	DOOR CLEARANCE	23" 58.4 cm	
	WATER INLET (1)	1/2" F.P.T.	
	DRAIN SIZE	2" F.P.T.	
	HEIGHT (all doors closed)	79.8" 202.6 cm	
NOTE: Probe & Chemical Inlet Holes (7/8") Are Provided In The Tank	WIDTH, TABLE TO TABLE (Inline Mod	del)34" 86.3 cm	
	WIDTH w/SCRAP ACCUMULATOR (C	Overall)45.5" 115.5 cm	
	DEPTH (Overall)	38.75" 98.4 cm	
NOTE: sted have a tolerance of nless otherwise noted.	SHIPPING WEIGHT	580 POUNDS 263 kg	
© 7/06	SHIPPING VOLUME	119.7 cu. feet	
ADS has built a strong	history based on Customer Service, C	Quality and Reliability.	

Toll Free

Phone

A Commitment to Excellence is the driving force behind American Dish Service.

Fax